

TABLE OF CONTENTS

1 HP Ratings for Gasoline Engines

COMMERCIAL

5 Command PRO. EFI

5-6 ECV850, 860, 870, 880

7-8 ECH940, 980

9-10 ECV940, 980

11-12 ECH630, 650, 730, 740, 749

13-14 ECV630, 650, 730, 740, 749

15-16 ECH440, 440LE

17 Command PRO Twin-Cylinder

17-18 CH940, 980, 1000

19-20 CH620, 640, 682, 732, 742, 752

21-22 CH620, 640, 680, 730, 740, 750

23-24 CV620, 640, 682, 732, 742, 752

25-26 CV620, 640, 680, 730, 740, 750

27 Command PRO EFI Propane

27-28 PCV850, 860

29-30 PCV680, 740

31-32 PCH680, 740

33 Command PRO LP & NG

33-34 CH730LP, 740LP / NG

35 Command PRO EFI Flex Fuel

35-36 FCV740, 749, FCH749

37 Aegis.

37-38 ELH750, 775

39 Command PRO Single-Cylinder

39-40 CH245, 255, 260, 270, 395, 440

41 Command PRO Tri-Fuel

41-42 CH270TF, 395TF, 440TF

COMMERCIAL/CONSUMER

45 Confidant. EFI

45-46 EZT715, 725, 740, 750

47 Confidant

47-48 ZT710, 720, 730, 740

49 SH Series.

49-50 SH255, 265

51 HD Series.

51-52 HD675, 775

CONSUMER

55 7500 Series..EFI

55-56 EKT740, 745, 750

57 7000 Series..

57-58 KT715, 725, 730, 735, 740, 745

59 6600 Series..

59-60 KT600, 610, 620

61 5400 Series..

61-62 KS530, 540, 590, 595

63 RH Series..

63-64 RH255, 265

65 XT Series..

65-66 XT650, 675, 775

67 XTX Series..

67-68 XTX650, 675, 775

HORSEPOWER RATINGS FOR GASOLINE ENGINES

GROSS HORSEPOWER RATINGS AT 3600 RPM (UNLESS OTHERWISE STATED) AS PER SAE J1940


GRADE	ENGINE FAMILY	TOP FEATURES	SHAFT	4.5	5.5	6	7	9.5	14	19	19.5	20	20.5	21	21.5	22	22.5	23	23.5	24	25	26	26.5	27	29	30	31	32.5	33	34	35	37	38	
COMMERCIAL	Command PRO, EFI	Closed-Loop EFI, Premium Filters, 3-Yr Commercial Warranty	H						•	•				•				•			•		•								•	•		
			V								•				•				•			•		•	•	•		•				•	•	
	Command PRO Twin-Cylinder	Hydraulic Valve Lifters, Premium Filters, 3-Yr Commercial Warranty	H								•						•			•		•							•			•	•	
			V								•			•				•			•		•		•									
	Command PRO EFI Propane	Closed-Loop EFI, Hydraulic Valve Lifters, Premium Filters, 3-Yr Commercial Warranty	H																•			•												
			V															•				•				•	•							
	Command PRO LP & NG	Hydraulic Valve Lifters, Large-Capacity Filters, 3-Yr Commercial Warranty	H									•					•	•																
			V																															
	Command PRO EFI Flex Fuel	Closed-Loop Flex Fuel EFI Up To E85, Four-Cycle, OHV, Cast-Iron Cylinder Liners, Aluminum Block, 3-Yr Commercial Warranty	H																				•											
			V/H																					•		•								
Aegis	Liquid-Cooled, Hydraulic Valve Lifters 3-Yr Commercial Warranty	H																							•		•							
		V																								•		•						
Command PRO Single-Cylinder	Quad-Clean—4-Stage Cyclonic Air Cleaner, Dual Ball Bearings, 3-Yr Commercial Warranty	H	•	•	*	*	*	•																										
		V																																
Command PRO Tri-Fuel	Quad-Clean—4-Stage Cyclonic Air Cleaner, Dual Ball Bearings, 3-Yr Commercial Warranty	H				*	*	•																										
		V																																

* Gross Horsepower Ratings at 4000 rpm

GROSS HORSEPOWER RATINGS AT 3600 RPM (UNLESS OTHERWISE STATED) AS PER SAE J1940

GRADE	ENGINE FAMILY	TOP FEATURES	SHAFT	6.5	6.75	7.75	4	5.5	6.5	9.5	14	15	16	17	18	19	20	20.5	21	22	22.5	23	23.5	24	25	26	27	
COMMERCIAL / CONSUMER	Confidant. EFI	Closed-loop EFI, Four-cycle, OHV, Cast-iron Cylinder Liners, Aluminum Block, 3-Yr. Commercial Warranty	V														•			•					•		•	
	Confidant	Commercial Durability; Larger Air, Oil & Fuel Filters; Optional Cyclonic Air Filter; 2-Yr Commercial, 3-Yr Consumer Warranty	V													•			•		•				•			
	SH Series.	Dual-Element Air Cleaner, Cast-Iron Liner. Dual Ball Bearing, 2-Yr Consumer Warranty	H					•	•																			
	HD Series.	Based on Commercial Engine Designs, Heavy-Duty Cast-Iron Cylinder Liners, Platinum-Tip Spark Plugs, High-Mount Dipstick, Overhead Valve, 5-Yr Consumer Warranty	V		*	*																						
CONSUMER	7000 Series.	Commercially Designed, Optional HD and PRO Performance Filtration, Pressure Lubrication, 3-Yr Consumer Warranty	V														•			•		•		•	•	•		
	7500 Series.. EFI	Commercially Designed, HD or PRO Performance Filtration, Pressure Lubrication, 3-Yr Consumer Warranty	V																						•	•	•	
	6600 Series.	Commercially Designed, Optional HD Performance Air Filtration, Pressure Lubrication, 3-Yr Consumer Warranty	V												•		•			•								
	5400 Series.	Twin-Cam Design, Pressure Lubrication, 2-Yr Consumer Warranty	V												•	•	•	•										
	RH Series.	Foam Element Air Cleaner, Aluminum Cylinder, Accu-Fill [®] Fuel Tank, 2-Yr Consumer Warranty	H					•	•																			
	XT Series.	Accu-Fill Easy-To-Fill Fuel Tank, Smart-Choke [™] with Easy-Pull, No-Prime Starting, Light-Weight Design, Overhead Valve, 2-Yr Consumer Warranty	V	*	*	*																						
	XTX Series.	No Oil Change Needed – Just Top Off, Based on Commercial Engine Design, Heavy-Duty Cast-Iron Cylinder Liners, Overhead Valve, 2-Yr Consumer Warranty	V	*	*	*																						

* Gross Torque Rating at 2800 rpm

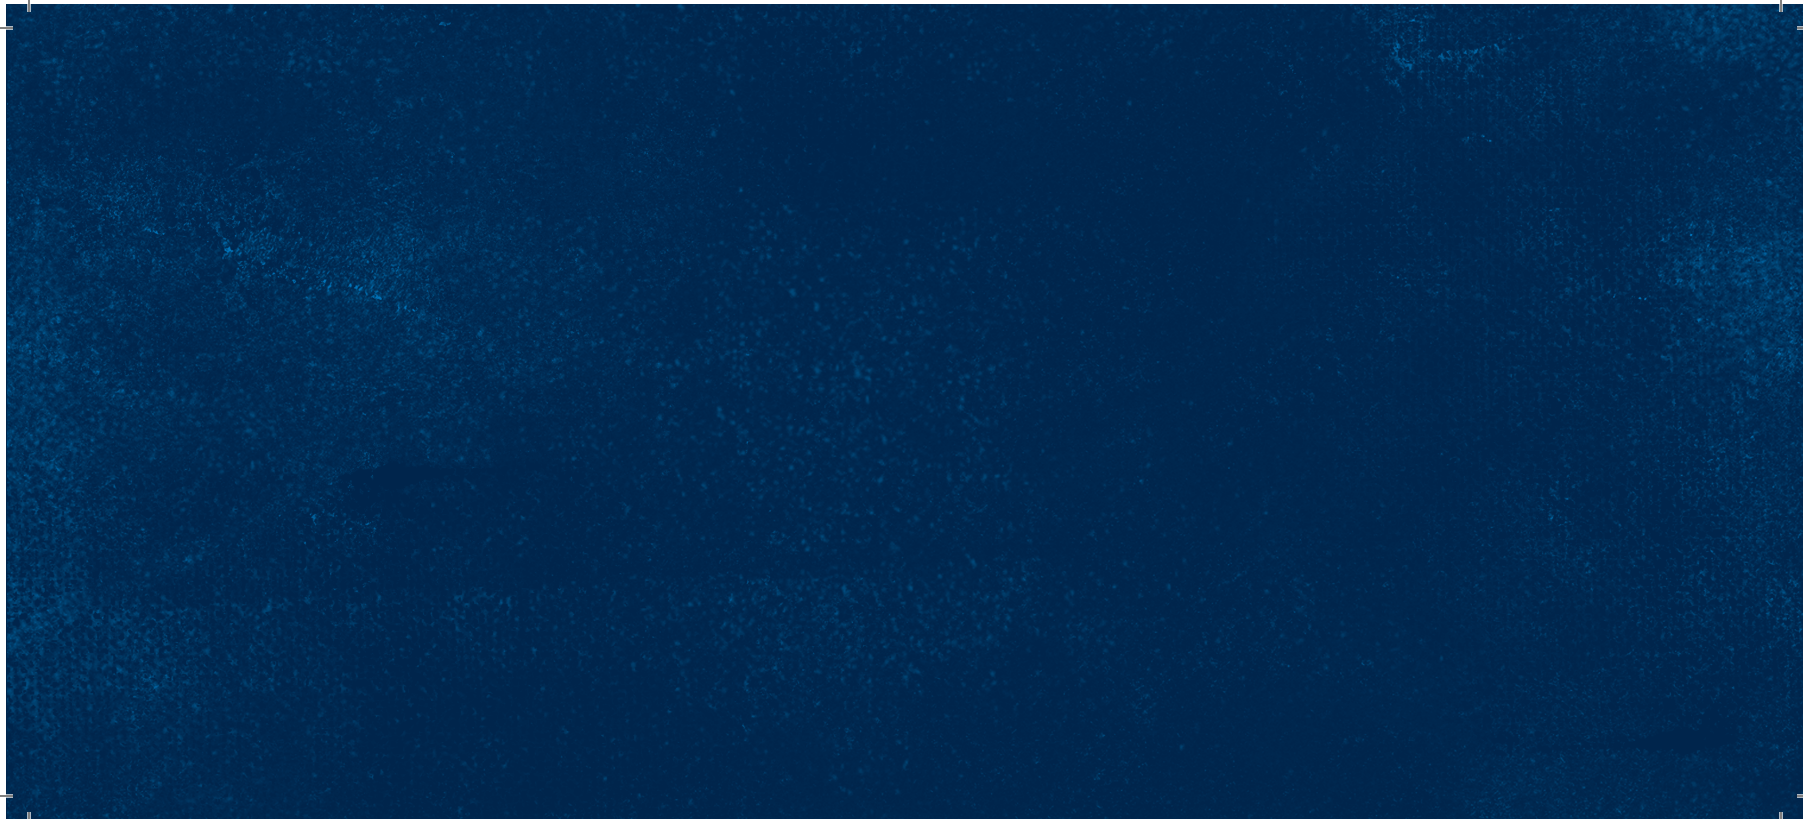




COMMERCIAL

Command PRO[®] EFI 824 cc


ECV850, ECV860, ECV870, ECV880

MAXIMUM POWER

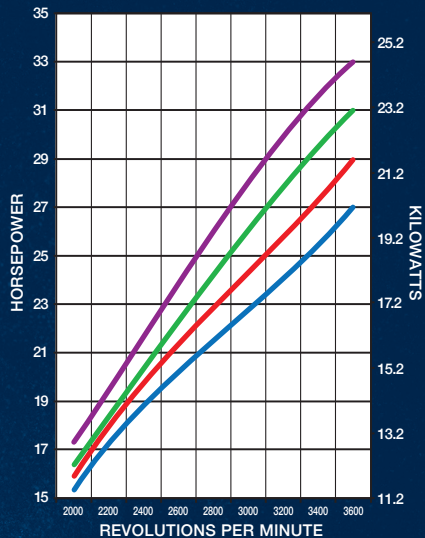

ECV850 ECV860
ECV870 ECV880

MAXIMUM TORQUE

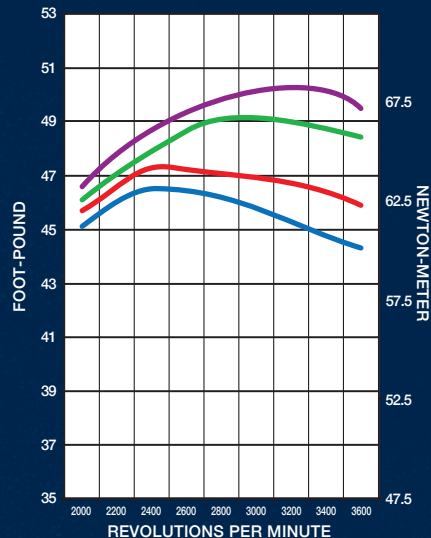


ECV850 ECV860
ECV870 ECV880

Command PRO® EFI 824 cc

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block
Additional Features
 Patent-pending intake manifold; extended cooling fins on cylinder head and crankcase; dual spark plugs; easy-access clean-out covers; large-capacity air, fuel and oil filters



27-33 HP

ECV880

MODEL		ECV850	ECV860	ECV870	ECV880
GROSS POWER @ 3600 RPM	max. hp (kW)	27 (20.1)	29 (21.6)	31 (23.1)	33 (24.6)
DISPLACEMENT	cu in (cc)	50.3 (824)			
BORE	in (mm)	3.4 (86)			
STROKE	in (mm)	2.8 (71)			
PEAK TORQUE @ RPM	ft-lb (Nm)	46.5 (63.0) @ 2400	47.3 (64.1) @ 2400	49.1 (66.6) @ 2800	50.2 (68.1) @ 3200
COMPRESSION RATIO		8.9:1			
DRY WEIGHT	lb (kg)	136 (62)			
OIL CAPACITY	U.S. qt (L)	2.7 (2.6)			
LUBRICATION		Full-pressure lubrication with full-flow filter			
DIMENSIONS* L x W x H	in (mm)	19.7 x 20.5 x 24 (500 x 520 x 610)			

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 6

Command PRO[®] EFI


ECH940, ECH980

MAXIMUM POWER

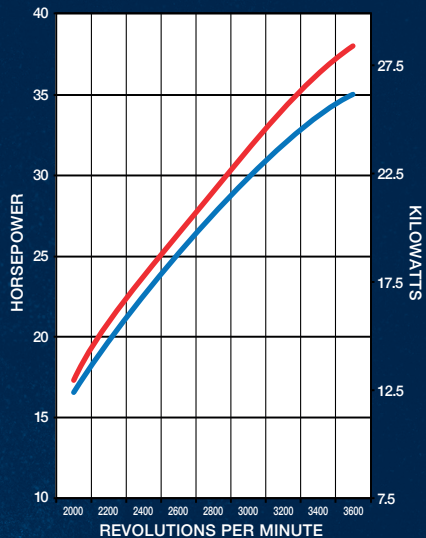

ECH940 ECH980

MAXIMUM TORQUE

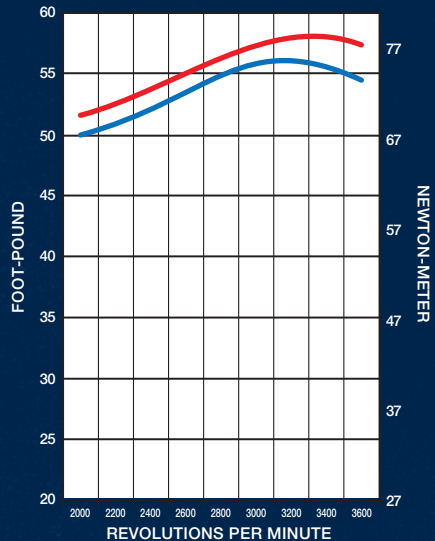

ECH940 ECH980

Command PRO® EFI



35-38 HP

ECH940

Cooling Air
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block

Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters

MODEL		ECH940	ECH980
GROSS POWER @ 3600 RPM	max. hp (kW)	35 (26.1)	38 (28.3)
DISPLACEMENT	cu in (cc)	61.0 (999)	
BORE	in (mm)	3.5 (90)	
STROKE	in (mm)	3.1 (78.5)	
PEAK TORQUE @ RPM	ft-lb (Nm)	56.0 (75.9) @ 3000	58.0 (78.6) @ 3400
COMPRESSION RATIO		8.8:1	
DRY WEIGHT	lb (kg)	132 (60)	
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)	
LUBRICATION		Full-pressure lubrication with full-flow filter	
DIMENSIONS* L x W x H	in (mm)	Low-profile air cleaner 15.8 x 19.1 x 23.6 (402 x 484 x 600) Heavy-duty air cleaner 17.1 x 19.1 x 27.5 (435 x 484 x 699)	

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 8

Command PRO[®] EFI


ECV940, ECV980

MAXIMUM POWER

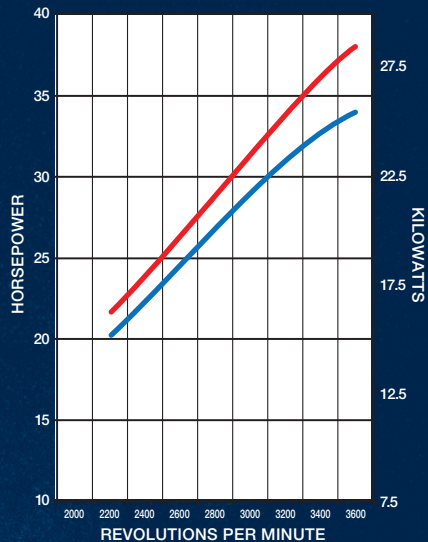

ECV940 ECV980

MAXIMUM TORQUE

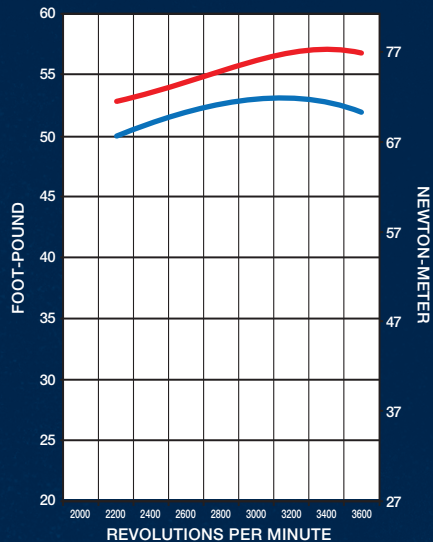

ECV940 ECV980

Command PRO® EFI



35-38 HP

ECV940

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block

Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters

MODEL		ECV940	ECV980
GROSS POWER @ 3600 RPM	max. hp (kW)	35 (26.1)	38 (28.3)
DISPLACEMENT	cu in (cc)	61.0 (999)	
BORE	in (mm)	3.5 (90)	
STROKE	in (mm)	3.1 (79)	
PEAK TORQUE @ RPM	ft-lb (Nm)	53.0 (71.8) @ 3200	56.9 (77.2) @ 3400
COMPRESSION RATIO		8.8:1	
DRY WEIGHT	lb (kg)	134 (61)	
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)	
LUBRICATION		Full-pressure lubrication with full-flow filter	
DIMENSIONS* L x W x H	in (mm)	22.1 x 19.1 x 26.8 (560 x 485 x 681)	

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 10

Command PRO[®] EFI


ECH630, ECH650, ECH730,
ECH740, ECH749

MAXIMUM POWER

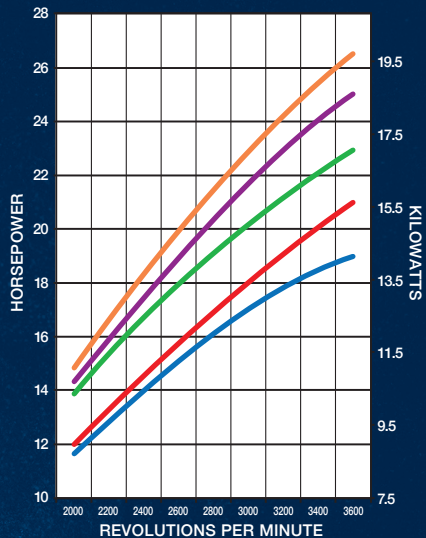

ECH630 ECH650 ECH730
ECH740 ECH749

MAXIMUM TORQUE

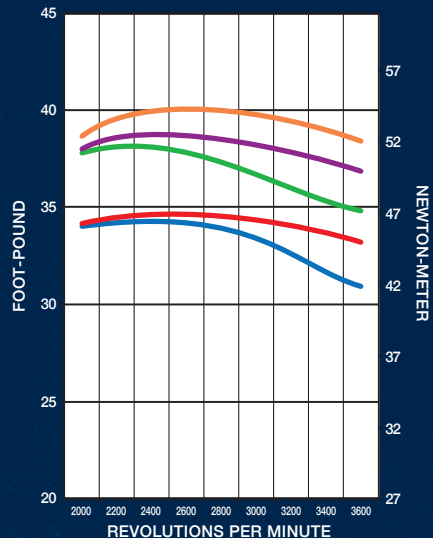

ECH630 ECH650 ECH730
ECH740 ECH749

Command PRO® EFI



19-26.5 HP

ECH749

Cooling Air
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block
Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters

MODEL		ECH630	ECH650	ECH730	ECH740	ECH749
GROSS POWER @ 3600 RPM	max. hp (kW)	19 (14.2)	21 (15.7)	23 (17.2)	25 (18.6)	26.5 (19.8)
DISPLACEMENT	cu in (cc)	42.4 (694)		45.6 (747)		
BORE	in (mm)	3.2 (80)		3.3 (83)		
STROKE	in (mm)	2.7 (69)				
PEAK TORQUE @ RPM	ft-lb (Nm)	34.2 (46.4) @ 2200	34.5 (46.8) @ 2600	38.1 (51.7) @ 2200	38.8 (52.6) @ 2400	40.0 (54.2) @ 2600
COMPRESSION RATIO		8.7:1		9.1:1		
DRY WEIGHT	lb (kg)	108 (49)				
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)				
LUBRICATION		Full-pressure lubrication with full-flow filter				
DIMENSIONS* L x W x H	in (mm)	Low-profile air cleaner 14.6 x 18.2 x 18.7 (371 x 462 x 475) Heavy-duty air cleaner 14.8 x 18.9 x 24.5 (376 x 480 x 622)				

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 12

Command PRO[®] EFI


ECV630, ECV650, ECV730,
ECV740, ECV749

MAXIMUM POWER

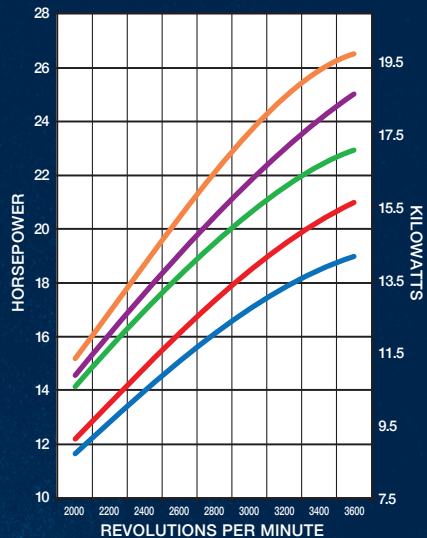

ECV630 ECV650 ECV730
ECV740 ECV749

MAXIMUM TORQUE

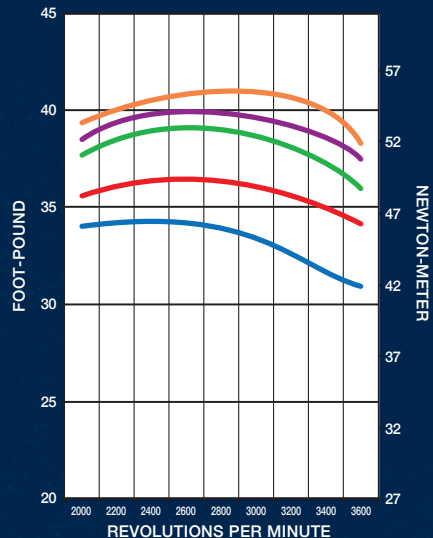

ECV630 ECV650 ECV730
ECV740 ECV749

Command PRO® EFI



19-26.5 HP

ECV749

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block

Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters

MODEL		ECV630	ECV650	ECV730	ECV740	ECV749
GROSS POWER @ 3600 RPM	max. hp (kW)	19 (14.2)	21 (15.7)	23 (17.2)	25 (18.6)	26.5 (19.8)
DISPLACEMENT	cu in (cc)	42.4 (694)		45.6 (747)		
BORE	in (mm)	3.2 (80)		3.3 (83)		
STROKE	in (mm)	2.7 (69)				
PEAK TORQUE @ RPM	ft-lb (Nm)	34.2 (46.4) @ 2200	36.4 (46.8) @ 2600	39.1 (51.7) @ 2200	39.9 (52.6) @ 2400	40.9 (54.2) @ 2600
COMPRESSION RATIO		8.7:1		9.1:1		
DRY WEIGHT	lb (kg)	108 (49)				
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)				
LUBRICATION		Full-pressure lubrication with full-flow filter				
DIMENSIONS*	L x W x H in (mm)	Low-profile air cleaner 17.9 x 18.3 x 14.5 (455 x 465 x 368) Heavy-duty air cleaner 21.3 x 18.5 x 17.6 (541 x 470 x 447)				

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 14

Command PRO[®] EFI


ECH440, ECH440LE

MAXIMUM POWER

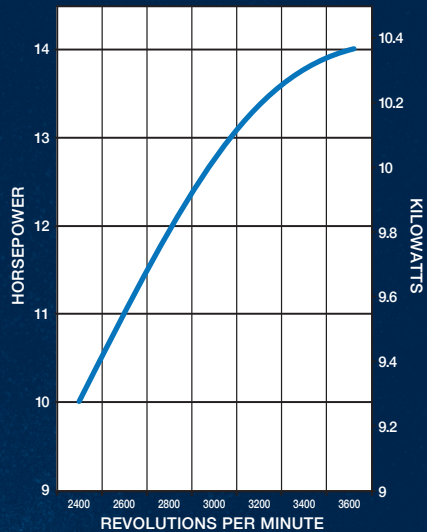

ECH440, ECH440LE

MAXIMUM TORQUE

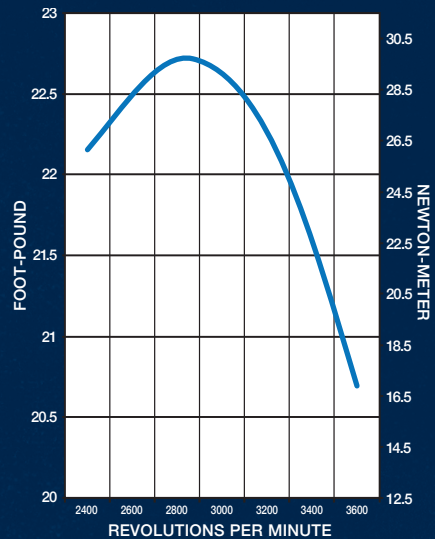

ECH440, ECH440LE

Command PRO® EFI

Cooling Air
Cylinders Single
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum head and crankcase.

Additional Features
 Quad-Clean™ four-stage cyclonic air cleaner, dual ball bearings, large metal fuel tank, ECH440LE includes catalytic muffler.



14 HP

ECH440

MODEL		ECH440	ECH440LE
GROSS POWER @ 3600 RPM	max. hp (kW)		14 (10.5)
DISPLACEMENT	cu in (cc)		26.2 (429)
BORE	in (mm)		3.5 (89)
STROKE	in (mm)		2.7 (69)
PEAK TORQUE @ RPM	ft-lb (Nm)		22.7 (30.8) @ 2800
COMPRESSION RATIO			8.3:1
DRY WEIGHT	lb (kg)		72.8 (33)
OIL CAPACITY	U.S. qt (L)		1.16 (1.1)
FUEL CAPACITY	U.S. qt (L)		7.4 (7)
LUBRICATION			Splash
DIMENSIONS* L x W x H	in (mm)	12.7 x 17.8 x 18.4 (324 x 452 x 467)	Consult factory for dimensions

RATED PER SAE J1940 GROSS


*Length is recoil starter to PTO mounting surface. Height is with USA 50 state evap fuel cap.

Commercial / 16

Command PRO®


CH940, CH980, CH1000

MAXIMUM POWER

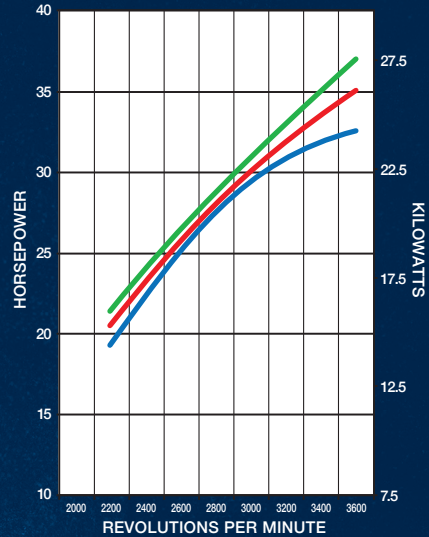


CH940 CH980 CH1000

MAXIMUM TORQUE

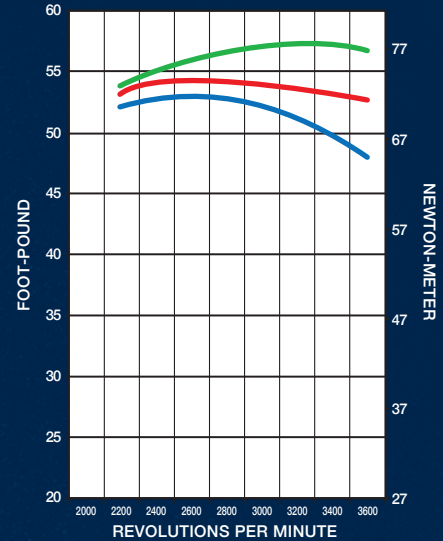

CH940 CH980 CH1000

Command PRO®



32.5-37 HP

CH1000

Cooling Air
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; two-barrel carburetor; hydraulic valve lifters

MODEL		CH940	CH980	CH1000
GROSS POWER @ 3600 RPM	max. hp (kW)	32.5 (24.2)	35 (26)	37 (27.5)
DISPLACEMENT	cu in (cc)	61 (999)		
BORE	in (mm)	3.5 (90)		
STROKE	in (mm)	3.1 (78.5)		
PEAK TORQUE @ RPM	ft-lb (Nm)	53.5 (71.8) @ 2600	54.3 (73.6) @ 2400	57.4 (77.8) @ 3200
COMPRESSION RATIO		8.8:1		
DRY WEIGHT	lb (kg)	131 (60)		
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)		
LUBRICATION		Full-pressure lubrication with full-flow filter		
DIMENSIONS* L x W x H	in (mm)	Low-profile air cleaner 15.8 x 19.1 x 23.6 (402 x 484 x 600) Heavy-duty air cleaner 17.1 x 19.1 x 27.5 (435 x 484 x 699)		

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 18

Command PRO[®]


CH620, CH640, CH682, CH732,
CH742, CH752

MAXIMUM POWER

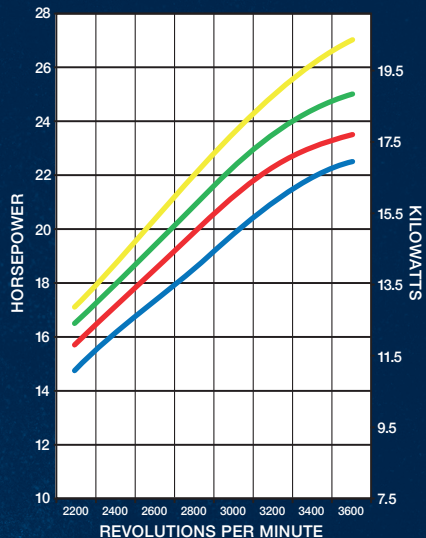

CH682 CH732
CH742 CH752

MAXIMUM TORQUE

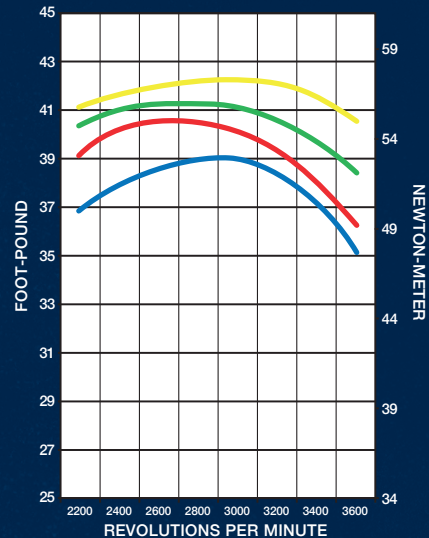

CH682 CH732
CH742 CH752

Command PRO®



19-27 HP

CH742

Cooling Air
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; two-barrel carburetor (only CH682, CH732, CH742, CH752); hydraulic valve lifters; heavy-duty air cleaner

MODEL		CH620	CH640	CH682	CH732	CH742	CH752
GROSS POWER @ 3600 RPM	max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
DISPLACEMENT	cu in (cc)	41.1 (674)		42.4 (694)	45.6 (747)		
BORE	in (mm)	3.1 (80)			3.3 (83)		
STROKE	in (mm)	2.6 (67)		2.7 (69)			
PEAK TORQUE @ RPM	ft-lb (Nm)	35.0 (47.5) @ 2400	35.7 (48.4) @ 2400	38.9 (52.7) @ 3000	40.4 (54.8) @ 2600	41.2 (55.9) @ 2600	42.2 (57.2) @ 3000
COMPRESSION RATIO		8.5:1		8.7:1	9.1:1		
DRY WEIGHT	lb (kg)	90 (41)		105 (48)			
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)					
LUBRICATION		Full-pressure lubrication with full-flow filter					
DIMENSIONS*	L x W x H in (mm)	CH620 – 640: 14 x 17.7 x 26.5 (355 x 451 x 672) CH682 – 752: 14.6 x 17.7 x 24.5 (371 x 451 x 622)					

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting surface.

Commercial / 20

Command PRO[®]


CH620, CH640, CH680, CH730,
CH740, CH750

MAXIMUM POWER

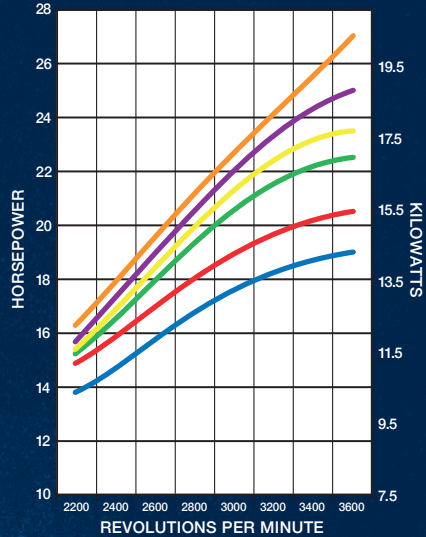

CH620 CH640 CH680
CH730 CH740 CH750

MAXIMUM TORQUE

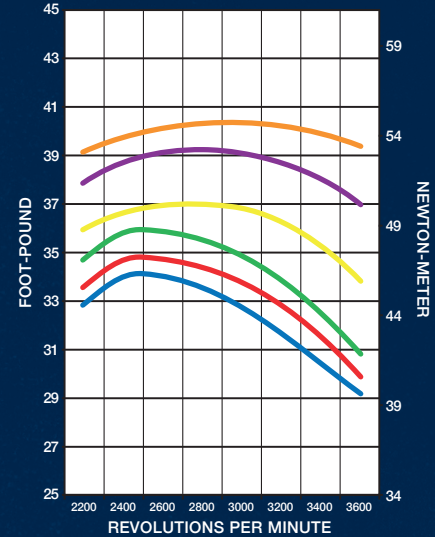

CH620 CH640 CH680
CH730 CH740 CH750

Command PRO®



19-27 HP

CH750

Cooling Air
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; two-barrel carburetor (CH750); hydraulic valve lifters

MODEL		CH620	CH640	CH680	CH730	CH740	CH750
GROSS POWER @ 3600 RPM	max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
DISPLACEMENT	cu in (cc)	41.1 (674)		44.2 (725)		45.6 (747)	
BORE	in (mm)	3.1 (80)		3.3 (83)			
STROKE	in (mm)	2.6 (67)					2.7 (69)
PEAK TORQUE @ RPM	ft-lb (Nm)	35.0 (47.5) @ 2400	35.7 (48.4) @ 2400	36.8 (49.9) @ 2800	38.4 (52.1) @ 2800	39.2 (53.1) @ 3000	41.2 (55.9) @ 3200
COMPRESSION RATIO		8.5:1			9.0:1		9.4:1
DRY WEIGHT	lb (kg)	90 (41)					105 (48)
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)					
LUBRICATION		Full-pressure lubrication with full-flow filter					
DIMENSIONS* L x W x H	in (mm)	CH620 – 740: 14 x 17.7 x 19 (355 x 421 x 483) CH750: 14 x 17.7 x 22.4 (355 x 451 x 568)					

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 22

Command PRO[®]


CV620, CV640, CV682, CV732,
CV742, CV752

MAXIMUM POWER

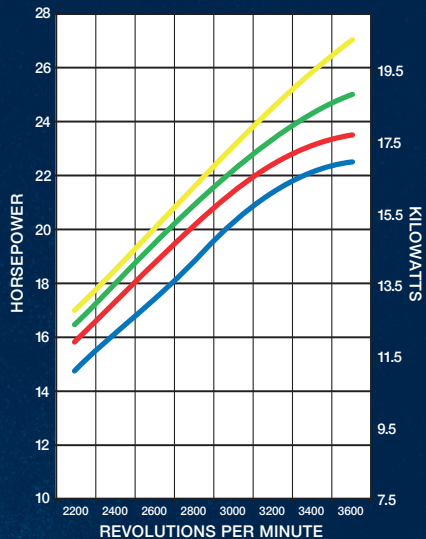

CV682 CV732
CV742 CV752

MAXIMUM TORQUE

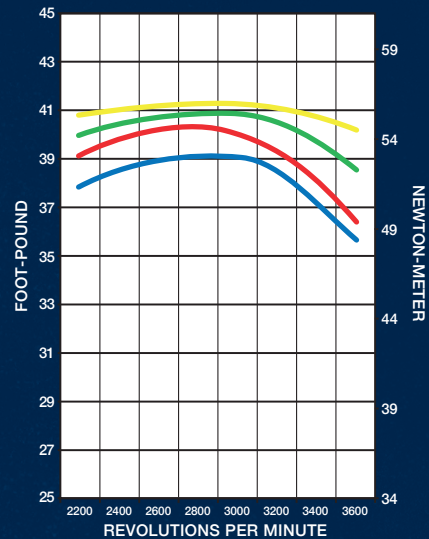

CV682 CV732
CV742 CV752

Command PRO®



19-27 HP

CV732

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters
 two-barrel carburetor on only CV682, CV732, CV742, CV752 and heavy-duty air cleaner

MODEL		CV620	CV640	CV682	CV732	CV742	CV752
GROSS POWER @ 3600 RPM	max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
DISPLACEMENT	cu in (cc)	41.1 (674)		42.4 (694)	45.6 (747)		
BORE	in (mm)	3.1 (80)			3.3 (83)		
STROKE	in (mm)	2.6 (67)		2.7 (69)			
PEAK TORQUE @ RPM	ft-lb (Nm)	34.0 (46.1) @ 2400	34.7 (47) @ 2400	39.0 (52.9) @ 2800	40.3 (54.6) @ 2800	40.8 (55.3) @ 3000	41.2 (55.9) @ 3000
COMPRESSION RATIO		8.5:1		8.7:1	9.1:1		
DRY WEIGHT	lb (kg)	90 (41)		105 (48)			
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)					
LUBRICATION		Full-pressure lubrication with full-flow filter					
DIMENSIONS*	L x W x H in (mm)	CV620 – 640: 20.5 x 17.7 x 22.5 (521 x 451 x 572) CV682 – 752: 20.5 x 16.2 x 19.9 (521 x 413 x 506)					

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting surface.

Commercial / 24

Command PRO®


CV620, CV640, CV680, CV730,
CV740, CV750

MAXIMUM POWER

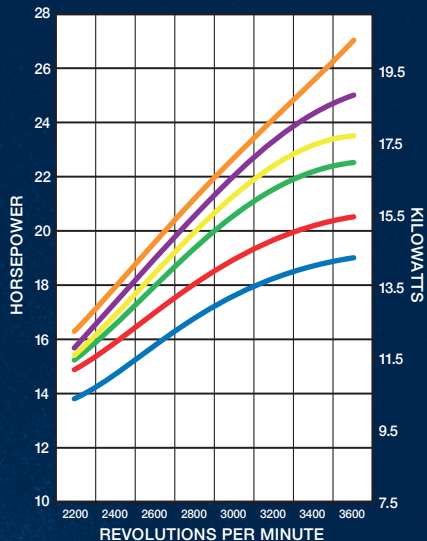

CV620 CV640 CV680
CV730 CV740 CV750

MAXIMUM TORQUE

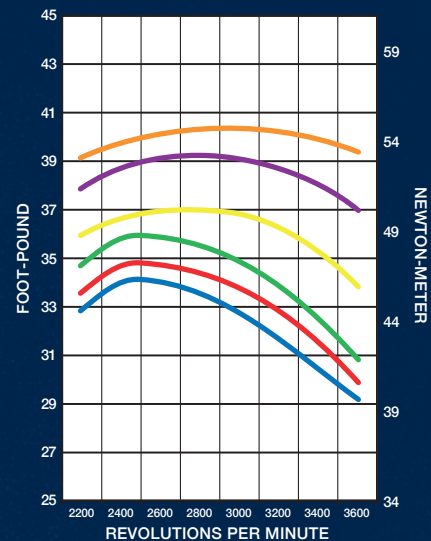

CV620 CV640 CV680
CV730 CV740 CV750

Command PRO®



19-27 HP

CV680

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features
 Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters

MODEL		CV620	CV640	CV680	CV730	CV740	CV750
GROSS POWER @ 3600 RPM	max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
DISPLACEMENT	cu in (cc)	41.1 (674)		44.2 (725)		45.6 (747)	
BORE	in (mm)	3.1 (80)		3.3 (83)			
STROKE	in (mm)	2.6 (67)			2.7 (69)		
PEAK TORQUE @ RPM	ft-lb (Nm)	34.0 (46.1) @ 2400	34.7 (47) @ 2400	35.8 (48.5) @ 2400	36.9 (50) @ 2800	39.2 (53.1) @ 2800	40.3 (54.6) @ 3000
COMPRESSION RATIO		8.5:1		9.0:1		9.4:1	
DRY WEIGHT	lb (kg)	90 (41)		94 (43)		105 (48)	
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)					
LUBRICATION		Full-pressure lubrication with full-flow filter					
DIMENSIONS* L x W x H	in (mm)	17.8 x 17.7 x 14.1 (452 x 451 x 358)					

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.

Commercial / 26

Command PRO[®] EFI Propane 824 cc


PCV850, PCV860

MAXIMUM POWER

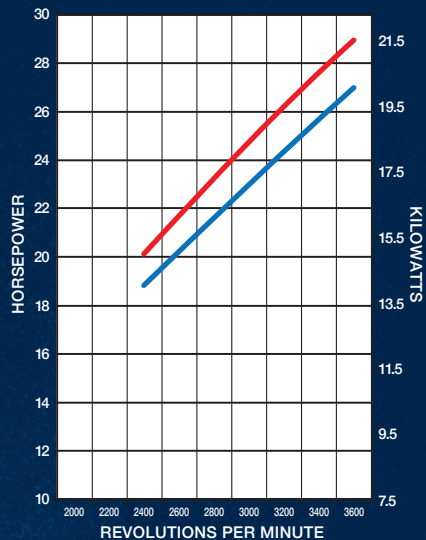

PCV850 PCV860

MAXIMUM TORQUE

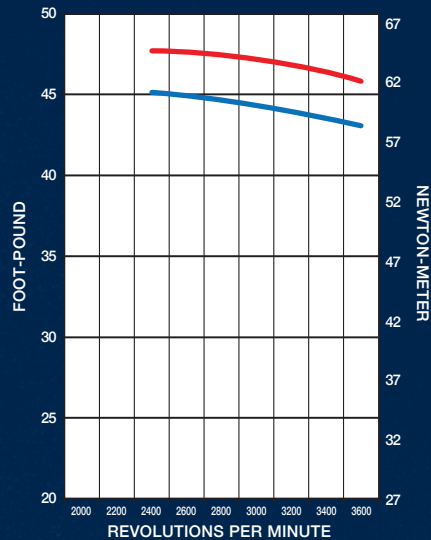

PCV850 PCV860

Command PRO® EFI Propane 824 cc



27-29 HP

PCV860

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type

Closed-loop EFI propane, four-cycle, OHV, cast-iron cylinder liners, aluminum block

Additional Features

Engine-mounted ECU and fuel pressure regulator; large-capacity air, fuel and oil filters; patent-pending intake manifold; dual spark plugs; easy-access clean-out covers

MODEL		PCV850	PCV860
GROSS POWER @ 3600 RPM	max. hp (kW)	27 (20.1)	29 (21.6)
DISPLACEMENT	cu in (cc)	50.3 (824)	
BORE	in (mm)	3.4 (86)	
STROKE	in (mm)	2.8 (71)	
PEAK TORQUE @ RPM	ft-lb (Nm)	45.2 (61.2) @ 2400	47.7 (64.7) @ 2400
COMPRESSION RATIO		8.9:1	
DRY WEIGHT	lb (kg)	136 (61.7)	
OIL CAPACITY	U.S. qt (L)	2.7 (2.6)	
LUBRICATION		Full-pressure lubrication with full-flow filter	
DIMENSIONS* L x W x H	in (mm)	21.9 x 20.5 x 24 (556 x 520 x 610)	

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 28

Command PRO® EFI Propane


PCV680, PCV740

MAXIMUM POWER

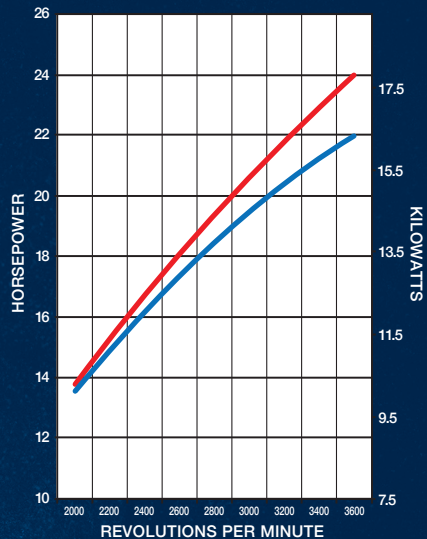

PCV680 PCV740

MAXIMUM TORQUE

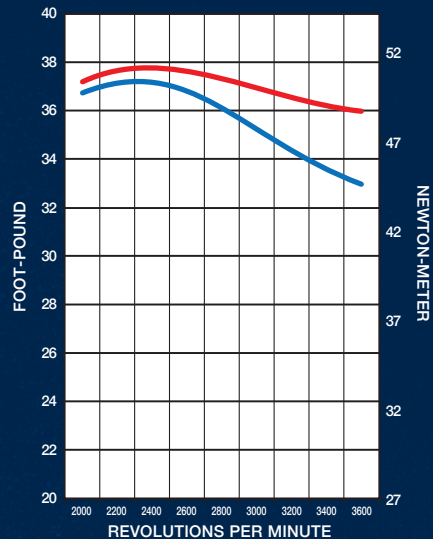

PCV680 PCV740

Command PRO® EFI Propane

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI propane, four-cycle, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Engine-mounted ECU and fuel pressure regulator, large-capacity air and oil filters, hydraulic valve lifters



22-24 HP

PCV740

MODEL		PCV680	PCV740
GROSS POWER @ 3600 RPM	max. hp (kW)	22 (16.4)	24 (17.9)
DISPLACEMENT	cu in (cc)	45 (747)	
BORE	in (mm)	3.3 (83)	
STROKE	in (mm)	2.7 (69)	
PEAK TORQUE @ RPM	ft-lb (Nm)	36.7 (49.8) @ 2200	37.3 (50.6) @ 2400
COMPRESSION RATIO		9.1:1	
DRY WEIGHT	lb (kg)	108 (49)	
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)	
LUBRICATION		Full-pressure lubrication with full-flow filter	
DIMENSIONS* L x W x H	in (mm)	Heavy-duty air cleaner 21.3 x 18.5 x 17.6 (541 x 470 x 447)	

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.

Commercial / 30

Command PRO® EFI Propane


PCH680, PCH740

MAXIMUM POWER

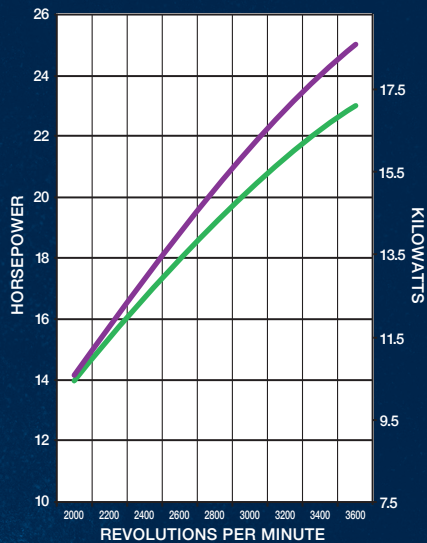

PCH680 PCH740

MAXIMUM TORQUE

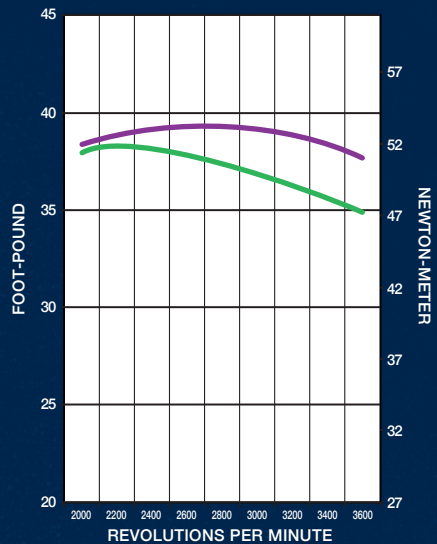

PCH680 PCH740

Command PRO® EFI Propane



23-25 HP

PCH740

Cooling Air
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI propane, four-cycle, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Engine-mounted ECU and fuel pressure regulator, large-capacity air and oil filters, hydraulic valve lifters

MODEL		PCH680	PCH740
GROSS POWER @ 3600 RPM	max. hp (kW)	23 (17.1)	25 (18.6)
DISPLACEMENT	cu in (cc)	45 (747)	
BORE	in (mm)	3.3 (83)	
STROKE	in (mm)	2.7 (69)	
PEAK TORQUE @ RPM	ft-lb (Nm)	38.0 (51.5) @ 2200	39.0 (52.8) @ 2800
COMPRESSION RATIO		9.1:1	
DRY WEIGHT	lb (kg)	108 (49)	
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)	
LUBRICATION		Full-pressure lubrication with full-flow filter	
DIMENSIONS* L x W x H	in (mm)	Low profile air cleaner 14.6 x 18.2 x 18.7 (371 x 462 x 475) Heavy-duty air cleaner 14.8 x 18.9 x 24.5 (376 x 480 x 622)	

RATED PER SAE J1940 GROSS


*Length is grass screen to PTO mounting face. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.

Commercial / 32

Command PRO[®] Carbureted Propane and Natural Gas


CH730LP, CH740LP/NG

MAXIMUM POWER

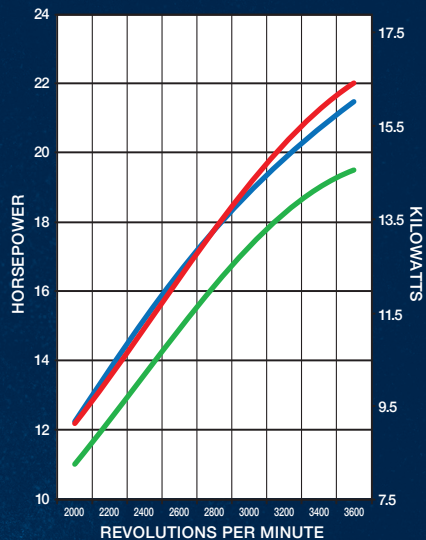

■ CH730 LP ■ CH740 LP/NG (on LP)
■ CH740 LP/NG (on NG)

MAXIMUM TORQUE

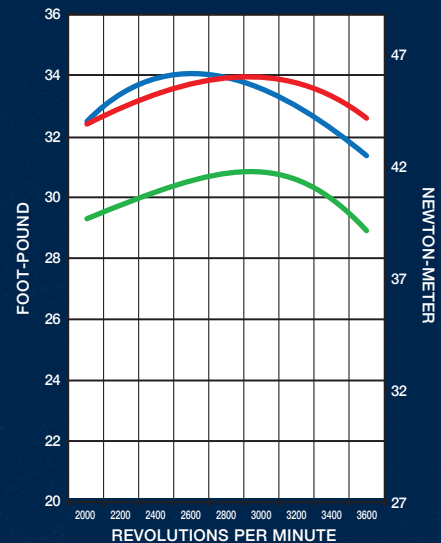

■ CH730 LP ■ CH740 LP/NG (on LP)
■ CH740 LP/NG (on NG)

Command PRO[®] Carbureted Propane and Natural Gas



19.5-22 HP

CH730LP

Cooling Air
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
Carbureted propane (CH730LP) and propane/natural gas (CH740 LP/NG),
Four-cycle, OHV, cast-iron cylinder liners, aluminum block

Additional Features
Large-capacity air and oil filters, high-performance spark plugs, hydraulic valve lifters

MODEL		CH730LP	CH740LP	CH740NG
FUEL		LP	LP	NG
GROSS POWER @ 3600 RPM	max. hp (kW)	21.5 (16.0)	22 (16.4)	19.5 (14.5)
DISPLACEMENT	cu in (cc)	44 (725)		
BORE	in (mm)	3.3 (83)		
STROKE	in (mm)	2.6 (67)		
PEAK TORQUE @ RPM	ft-lb (Nm)	34.0 (46.1) @ 2600	33.9 (46.0) @ 3000	30.8 (41.8) @ 3000
COMPRESSION RATIO		9.0:1		
DRY WEIGHT	lb (kg)	108 (49)	94 (43)	
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)		
LUBRICATION		Full-pressure lubrication with full-flow filter		
DIMENSIONS* L x W x H	in (mm)	14 x 17.7 x 19 (356 x 450 x 483)		

RATED PER SAE J1940 GROSS


*Length is grass screen to PTO mounting face. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.

Commercial / 34

Command PRO[®] EFI Flex Fuel


FCV740, FCV749, FCH749

MAXIMUM POWER

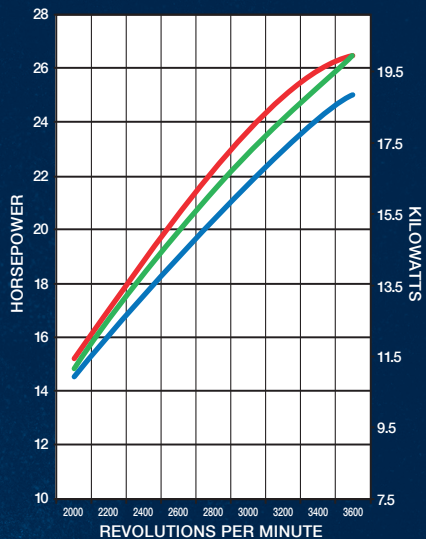

FCV740 FCV749 FCH749

MAXIMUM TORQUE

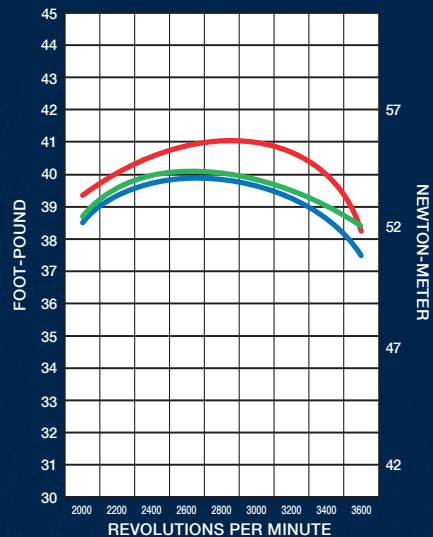

FCV740 FCV749 FCH749

Command PRO® EFI Flex Fuel

Cooling Air
Cylinders V-Twin
Shaft Vertical/Horizontal
Warranty 3-Yr Commercial

Engine Type
Closed-loop Flex Fuel EFI up to E85, four-cycle, OHV, cast-iron cylinder liners, aluminum block

Additional Features
Engine-mounted ECU, large-capacity air and oil filters, hydraulic valve lifters



25-26.5 HP

FCH749

MODEL		FCV740	FCV749	FCH749
GROSS POWER @ 3600 RPM	max. hp (kW)	25 (18.6)	26.5 (19.8)	26.5 (19.8)
DISPLACEMENT	cu in (cc)	45.6 (747)		
BORE	in (mm)	3.3 (83)		
STROKE	in (mm)	2.7 (69)		
PEAK TORQUE @ RPM	ft-lb (Nm)	39.9 (54.1) @ 2400	40.9 (55.5) @ 3000	40.0 (54.2) @ 2600
COMPRESSION RATIO		9.1: 1		
DRY WEIGHT	lb (kg)	108 (49)		
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)		
LUBRICATION		Full-pressure lubrication with full-flow filter		
DIMENSIONS* L x W x H	in (mm)	CV: 14.8 x 18.9 x 24.5 (376 x 480 x 622) CH: 14.0 x 17.7 x 19.0 (541 x 470 x 447)		

RATED PER SAE J1940 GROSS


*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

Commercial / 36

Aegis®


ELH750, ELH775

MAXIMUM POWER

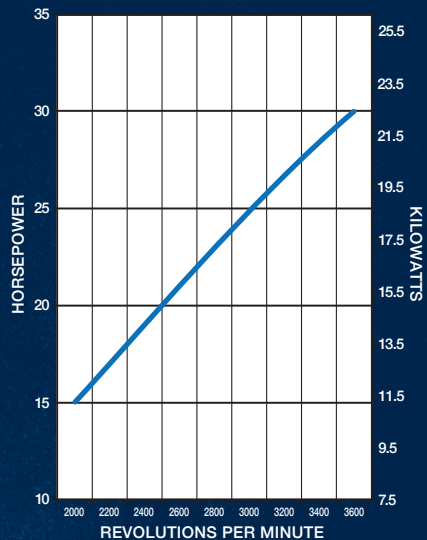

ELH775

MAXIMUM TORQUE

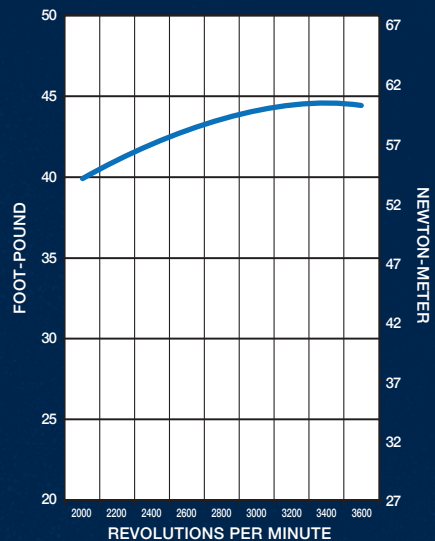

ELH775

Aegis®

Cooling Liquid
Cylinders V-Twin
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Automotive-style radiator, heavy-duty air filter, hydraulic valve lifters



27-30 HP

ELH775

MODEL		ELH750	ELH775
GROSS POWER @ 3600 RPM	max. hp (kW)	27 (20.1)	30 (22.4)
DISPLACEMENT	cu in (cc)	46 (747)	
BORE	in (mm)	3.3 (83)	
STROKE	in (mm)	2.7 (69)	
PEAK TORQUE @ RPM	ft-lb (Nm)	42.9 (58.2) @ 2400	44.6 (60.5) @ 3400
COMPRESSION RATIO		8.7:1	
DRY WEIGHT	lb (kg)	116 (53)	
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)	
LUBRICATION		Full-pressure lubrication with full-flow filter	
DIMENSIONS* L x W x H	in (mm)	17 x 18.1 x 26.5 (432 x 460 x 673)	

RATED PER SAE J1940 GROSS


*Length is radiator to closure plate. Width is radiator from side to side. Height is mounting feet to rain cap.

Commercial / 38

Command PRO®


CH245, CH255, CH260, CH270,
CH395, CH440

MAXIMUM POWER

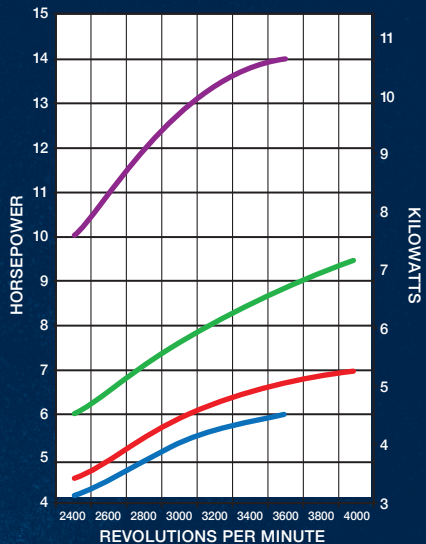

CH260 CH270
CH395 CH440

MAXIMUM TORQUE

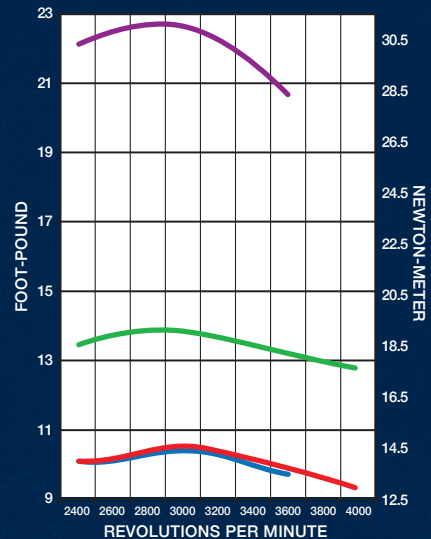

CH260 CH270
CH395 CH440

Command PRO®



4.5-14 HP

CH245

Cooling Air
Cylinders Single
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum head and crankcase
Additional Features
 Quad-Clean™ four-stage cyclonic air cleaner, Fuel Secure™ (auto fuel shutoff), dual ball bearings, large metal fuel tank

MODEL		CH245	CH255	CH260	CH270	CH395	CH440
GROSS POWER @ RPM	max. hp (kW)	4.5 (3.3) @ 3600	5.5 (4.0) @ 3600	6 (4.5) @ 4000	7 (5.2) @ 4000	9.5 (7.1) @ 4000	14 (10.5) @ 3600
DISPLACEMENT	cu in (cc)	10.8 (177)		12.7 (208)		16.9 (277)	26.2 (429)
BORE	in (mm)	2.7 (68)		2.8 (70)		3.1 (78)	3.5 (89)
STROKE	in (mm)	1.9 (49)		2.1 (54)		2.3 (58)	2.7 (69)
PEAK TORQUE @ RPM	ft-lb (Nm)	7.2 (9.8) @ 2800	8.3 (11.2) @ 2800	10.4 (14.1) @ 3000	10.5 (14.2) @ 3000	13.9 (18.8) @ 2800	22.7 (30.8) @ 2800
COMPRESSION RATIO		8.5:1		8.8:1			8.3:1
DRY WEIGHT	lb (kg)	33.2 (15)		38.7 (17.5)		61.5 (27.9)	72.8 (33)
OIL CAPACITY	U.S. qt (L)	0.6 (0.6)				1.16 (1.3)	
FUEL CAPACITY	U.S. qt (L)	3.1 (3.0)		4.2 (4)		7.4 (7)	
LUBRICATION		Splash					
DIMENSIONS* L x W x H	in (mm)	10.3 x 15.2 x 15.2 (261 x 385 x 386)		10.3 x 15.2 x 15.1 (260 x 385 x 384)		12.4 x 17.8 x 16.8 (315 x 452 x 428)	12.7 x 17.8 x 18.4 (324 x 452 x 467)

RATED PER SAE J1940 GROSS

*Length is recoil starter to PTO mounting surface. Height is with USA 50 state evap fuel cap.

Commercial / 40

Command PRO® Tri-Fuel

CH270TF, CH395TF, CH440TF

Command PRO® Tri-Fuel

Cooling Air
Cylinders Single
Shaft Horizontal
Warranty 3-Yr Commercial

Engine Type
 Four-cycle, tri-fuel conversion, OHV, cast-iron cylinder liner, aluminum head and crankcase
Additional Features
 Quad-Clean™ four-stage cyclonic air cleaner, Fuel Secure™ (auto fuel shutoff), dual ball bearings, large metal fuel tank



7-14 HP


CH440TF

MODEL		CH270TF	CH395TF	CH440TF	
GROSS POWER GASOLINE LIQUID PROPANE NATURAL GAS	max. hp (kW)	7 (5.2) @ 4000 6.3 (4.7) @ 4000† 5.5 (4.2) @ 4000†	9.5 (7.1) @ 4000 8.5 (6.4) @ 4000† 7.5 (5.7) @ 4000†	14 (10.5) @ 3600 12.5 (9.5) @ 3600† 11.2 (8.4) @ 3600†	
	DISPLACEMENT	cu in (cc)	12.7 (208)	16.9 (277)	26.2 (429)
	BORE	in (mm)	2.8 (70)	3.1 (78)	3.5 (89)
STROKE	in (mm)	2.1 (54)	2.3 (58)	2.7 (69)	
PEAK TORQUE @ RPM	ft-lb (Nm)	10.5 (14.2) @ 3000	13.9 (18.8) @ 2800	22.7 (30.8) @ 2800	
COMPRESSION RATIO		8.8:1		8.3:1	
DRY WEIGHT	lb (kg)	38.7 (17.5)	61.5 (27.9)	72.8 (33)	
OIL CAPACITY	U.S. qt (L)	0.6 (0.6)	1.16 (1.1)		
FUEL CAPACITY	U.S. qt (L)	4.2 (4)	7.4 (7)		
LUBRICATION		Splash			
DIMENSIONS* L x W x H	in (mm)	10.3 x 15.2 x 15.1 (260 x 385 x 384)	12.4 x 17.8 x 16.8 (315 x 452 x 428)	12.7 x 17.8 x 18.4 (324 x 452 x 467)	

RATED PER SAE J1940 GROSS

*Length is recoil starter to PTO mounting surface. Height is with USA 50 state evap fuel cap.
 †HP data for liquid propane and natural gas are preliminary.

Commercial / 42

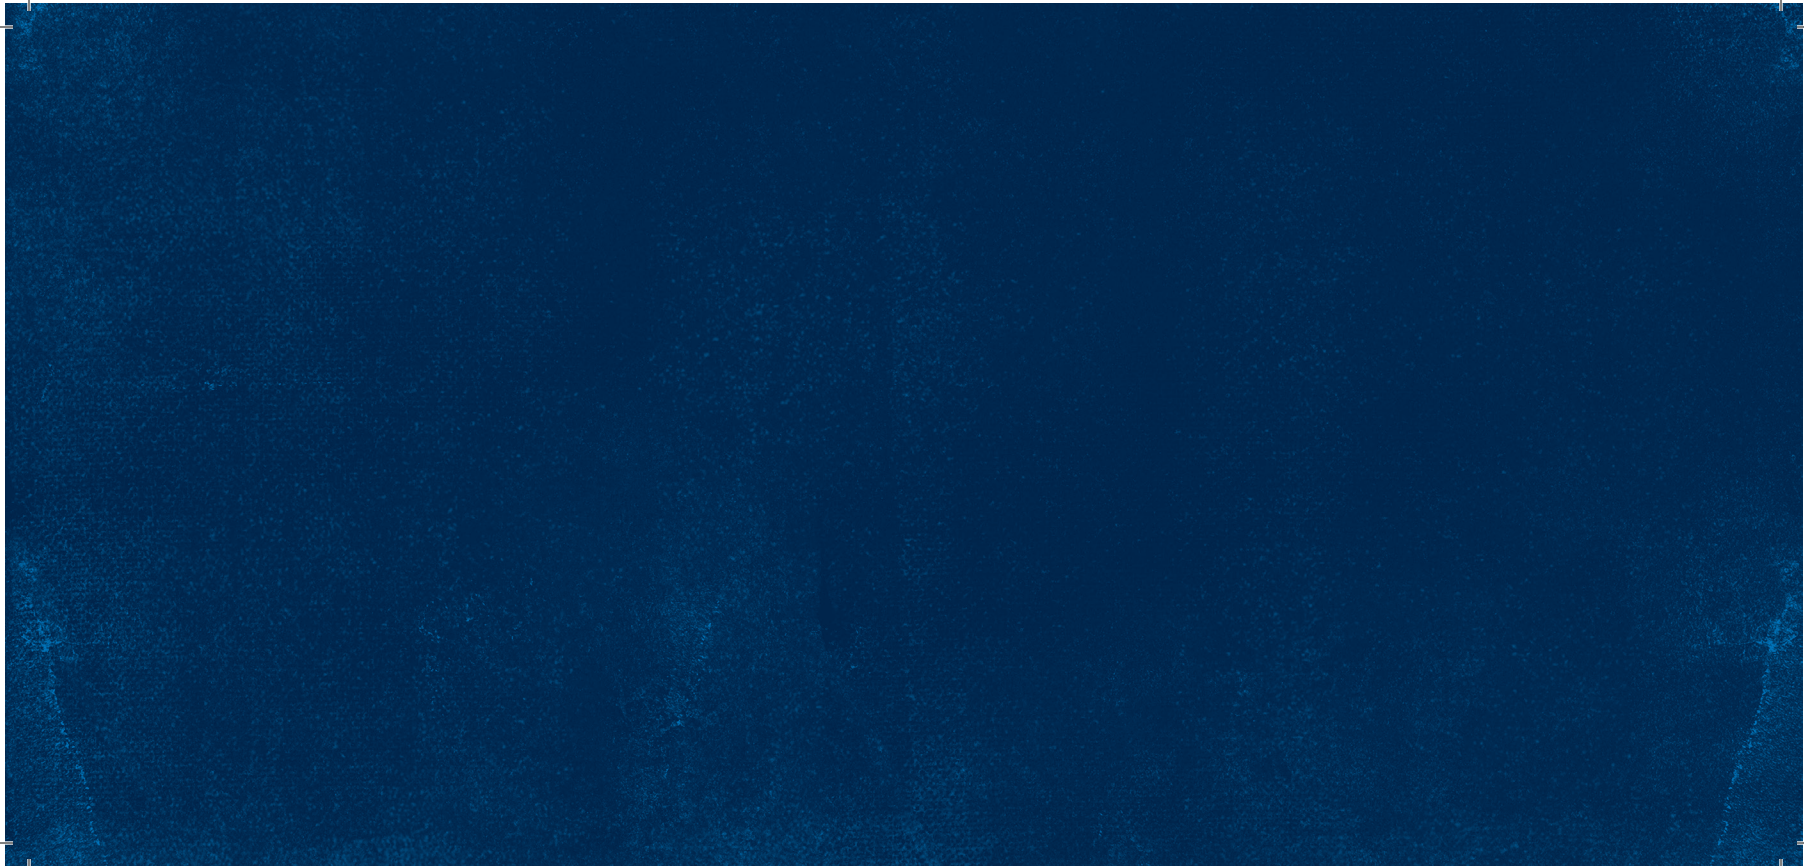




COMMERCIAL / CONSUMER

Confidant® EFI


EZT715, EZT725, EZT740, EZT750

MAXIMUM POWER

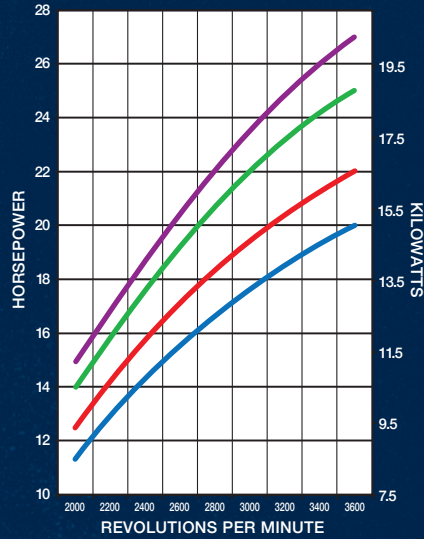

EZT715 EZT725
EZT740 EZT750

MAXIMUM TORQUE

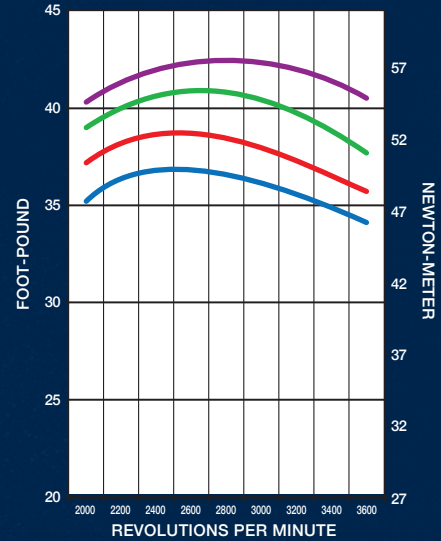

EZT715 EZT725
EZT740 EZT750

Confidant® EFI



20-27 HP

EZT750

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Commercial

Engine Type

Closed-loop EFI, four-cycle, OHV, cast-iron cylinder liners, aluminum block

Additional Features

Consistent-Cut.™ technology for more consistent power; large capacity air, fuel and oil filters; chopper grass screen with stamped-steel guard; recoil-start option for wide-area walk-behind and stand-on mowers

MODEL		EZT715	EZT725	EZT740	EZT750
GROSS POWER @ 3600 RPM	max. hp (kW)	20 (14.9)	22 (16.4)	25 (18.6)	27 (20.1)
DISPLACEMENT	cu in (cc)	44.2 (725)		45.6 (747)	
BORE	in (mm)	3.3 (83)			
STROKE	in (mm)	2.6 (67)		2.7 (69)	
PEAK TORQUE @ RPM	ft-lb (Nm)	36.8 (49.9) @ 2400	38.8 (52.6) @ 2600	40.9 (55.5) @ 2600	42.4 (57.5) @ 2800
COMPRESSION RATIO		9.0:1			
DRY WEIGHT	lb (kg)	91 (41.3)			
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)			
LUBRICATION		Full-pressure lubrication with full-flow filter			
DIMENSIONS* L x W x H	in (mm)	Standard: 18.8 x 18.9 x 17 (478 x 479 x 431)			

RATED PER SAE J1940 GROSS


*Length is front of air cleaner cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen.

Commercial/Consumer / 46

Confidant[®]


ZT710, ZT720, ZT730, ZT740

MAXIMUM POWER

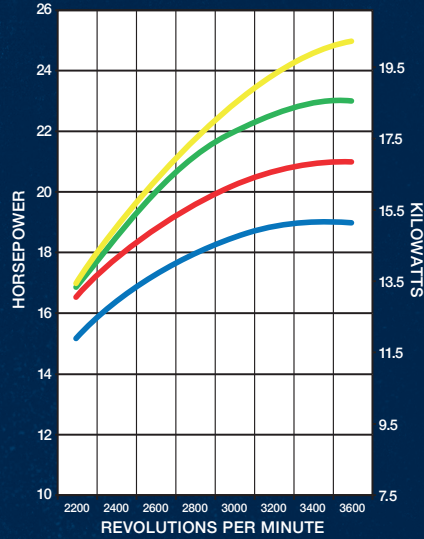

ZT710 ZT720
ZT730 ZT740

MAXIMUM TORQUE

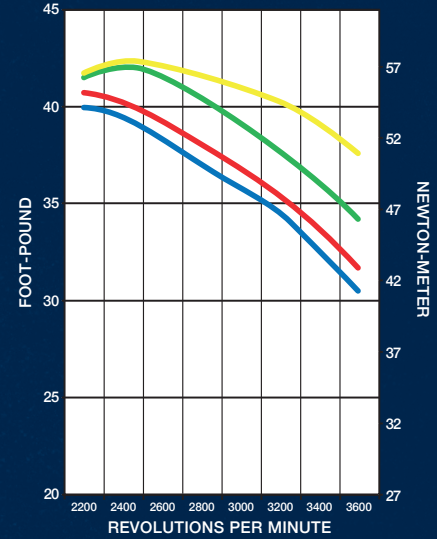

ZT710 ZT720
ZT730 ZT740

Confidant.

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 2-Yr Commercial
 3-Yr Consumer

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder bores, aluminum block

Additional Features
 Consistent-Cut. technology for more consistent power; PRO Performance air, oil and fuel filters; high-impact nylon shroud. Available in electric starting (all models) or recoil starting (ZT710/ZT720 only).

Premium Options
 Commercial Durability Package (includes 3-year commercial warranty); chopper grass screen, cyclonic heavy-duty air cleaner, solenoid shift starter, eChoke. technology



19-25 HP

ZT720

MODEL		ZT710	ZT720	ZT730	ZT740
GROSS POWER @ 3600 RPM	max. hp (kW)	19 (14.2)	21 (15.7)	23 (17.2)	25 (18.6)
DISPLACEMENT	cu in (cc)	44 (725)		46 (747)	
BORE	in (mm)	3.3 (83)			
STROKE	in (mm)	2.6 (67)		2.7 (69)	
PEAK TORQUE @ RPM	ft-lb (Nm)	40.0 (54.2) @ 2200	40.7 (55.2) @ 2200	42.1 (57.1) @ 2400	42.4 (57.5) @ 2400
COMPRESSION RATIO		9.0:1			
DRY WEIGHT	lb (kg)	91 (41.3)			
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)			
LUBRICATION		Full-pressure lubrication with full-flow filter			
DIMENSIONS* L x W x H	in (mm)	18.8 x 17.5 x 14.9 (478 x 443 x 378) With cyclonic filter: 18.8 x 17.5 x 17 (478 x 443 x 431)			

RATED PER SAE J1940 GROSS


*Length is front of air cleaner cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen.

Commercial/Consumer / 48

SH Series™


SH255, SH265

MAXIMUM POWER

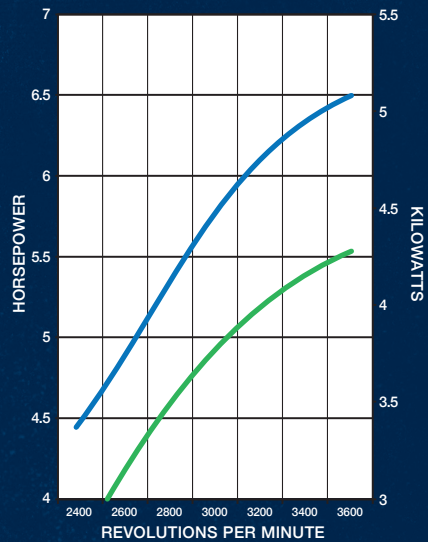

■ SH255 ■ SH265

MAXIMUM TORQUE

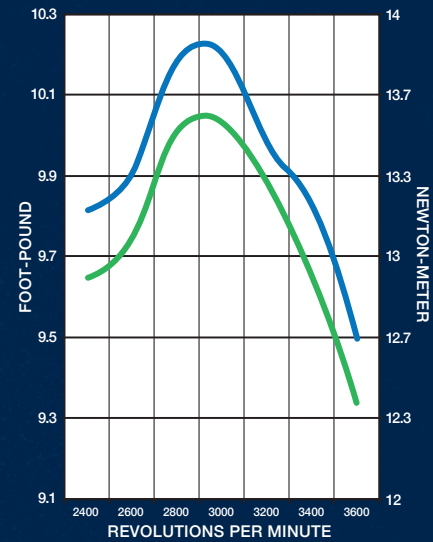

■ SH255 ■ SH265

SH Series™



5.5-6.5 HP

SH265

Cooling Air
Cylinders Single
Shaft Horizontal
Warranty 2-Yr Consumer

Engine Type
Four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block
Additional Features
Dual oil fills and drains, dual-element air cleaner, large metal fuel tank

MODEL	SH255		SH265	
GROSS POWER @ 3600 RPM	max. hp (kW)	5.5 (4.2)		6.5 (4.8)
DISPLACEMENT	cu in (cc)	12 (196)		
BORE	in (mm)	2.7 (68)		
STROKE	in (mm)	2.1 (54)		
PEAK TORQUE @ RPM	ft-lb (Nm)	10.0 (13.6) @ 3000		10.2 (13.8) @ 3000
COMPRESSION RATIO		8.5:1		
DRY WEIGHT	lb (kg)	35.3 (16)		
OIL CAPACITY	U.S. qt (L)	0.6 (0.6)		
FUEL CAPACITY	U.S. qt (L)	3.4 (3.3)		
LUBRICATION		Splash		
DIMENSIONS* L x W x H	in (mm)	9.9 x 14.5 x 14.6 (253 x 369 x 371)		

RATED PER SAE J1940 GROSS


*Length is recoil starter to PTO mounting surface. Height is with USA 50 state evap fuel cap.

Commercial/Consumer / 50

HD Series™

HD675, HD775

MAXIMUM TORQUE

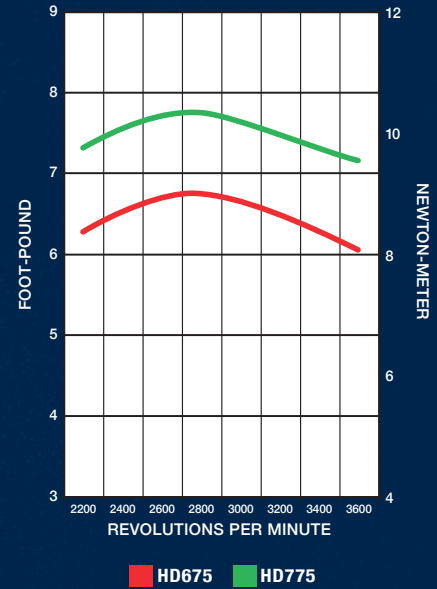

HD Series™



6.75-7.75 FT-LB GROSS TORQUE **HD775**

Cooling Air
Cylinders Single
Shaft Vertical
Warranty 5-Yr Consumer
 1-Yr Commercial

Engine Type
 Four-cycle, air-cooled, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Based on commercial engine designs, heavy-duty cast-iron cylinder liners, platinum-tip spark plugs, high-mount dipstick, pre-cleaner, Accu-Fill, easy-to-fill fuel tank, Consistent-Cut, technology for more consistent power, Smart-Choke, with easy-pull, no-prime starting

MODEL		HD675	HD775
GROSS TORQUE @ 2800 RPM	ft lb (Nm)	6.75 (9.2)	7.75 (10.5)
DISPLACEMENT	cu in (cc)	9.1 (149)	10.6 (173)
BORE	in (mm)	2.6 (65)	2.7 (70)
STROKE	in (mm)	1.8 (45)	
COMPRESSION RATIO		9.2:1	8.5:1
DRY WEIGHT	lb (kg)	23.8 (10.8)	26.9 (12.2)
OIL CAPACITY	U.S. qt (L)	0.6 (0.6)	
FUEL CAPACITY	U.S. qt (L)	1.2 (1.1)	1.5 (1.4)
LUBRICATION		Splash	
DIMENSIONS* L x W x H	in (mm)	14.4 x 14 x 10.5 (366 x 356 x 267)	17.1 x 13.9 x 11 (434 x 353 x 279)

RATED PER SAE J1940 GROSS

*Length is front of blower housing to back of blower housing. Width is air cleaner cover to muffler guard. Height is mounting surface to grass screen.

Commercial/Consumer / 52





CONSUMER

7500 Series™ EFI

EKT740, ETK745, EKT750

7500 Series™ EFI



25-27 HP

EKT740

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty HD: 3-Yr Consumer
 90-Day Commercial
 PRO: 3-Yr Consumer
 1-Yr Commercial

Engine Type

Closed-loop EFI, four-cycle, gasoline, OHV, cast-iron cylinder bore, aluminum block

Additional Features

First-ever consumer twin-cylinder EFI engine based on commercial engine designs, heavy-duty cast-iron liners, pressure lubrication, Consistent-Cut. technology for more consistent power, dual-sealed air filter

MODEL		EKT740	EKT745	EKT750
GROSS POWER @ 3600 RPM	max. hp (kW)	25 (18.6)	26 (19.4)	27 (20.1)
DISPLACEMENT	cu in (cc)	45 (747)		
BORE	in (mm)	3.3 (83)		
STROKE	in (mm)	2.7 (69)		
PEAK TORQUE @ RPM	ft-lb (Nm)	38.43 (52.1) @ 2600	39.5 (53.5) @ 2600	40.7 (55.2) @ 2600
COMPRESSION RATIO		9.1:1		
DRY WEIGHT	lb (kg)	85 (38.6)		
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)		
LUBRICATION		Pressure lubrication with full-flow filter		
DIMENSIONS* L x W x H	in (mm)	With HD Performance Filtration: 18.6 x 17.5 x 13.9 (473 x 445 x 354) With PRO Performance Filtration: 18.7 x 17.5 x 15.7 (475 x 445 x 399)		

RATED PER SAE J1940 GROSS


*Length is front of air cleaner cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen or air filter.

Consumer / 56

7000 Series™


KT715, KT725, KT730, KT735, KT740, KT745

MAXIMUM POWER

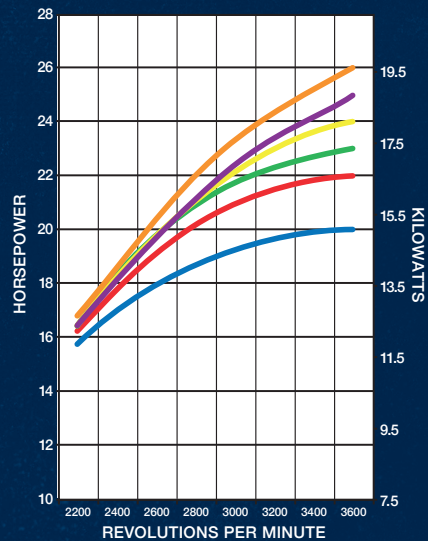

KT715 KT725 KT730
KT735 KT740 KT745

MAXIMUM TORQUE

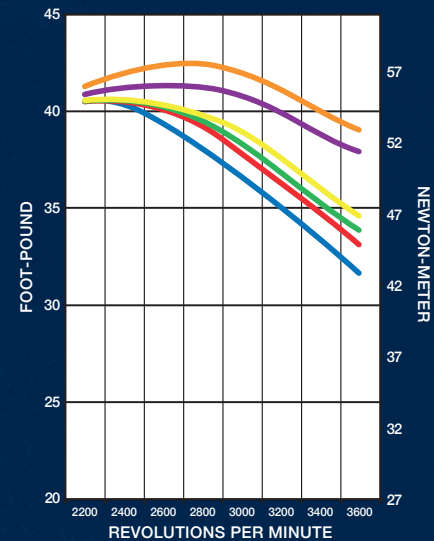

KT715 KT725 KT730
KT735 KT740 KT745

7000 Series™



20-26 HP

KT745

Engine Type
Four-cycle, gasoline, OHV, cast-iron cylinder bore, aluminum block

Cooling Air

Cylinders V-Twin

Shaft Vertical

Warranty 3-Yr Consumer
90-Day Commercial†

Additional Features
Based on commercial engine designs, heavy-duty cast-iron cylinder liners, pressure lubrication, Consistent-Cut. technology for more consistent power, dual-sealed air filter, optional HD or PRO Performance air filtration and platinum spark plugs, Smart-Choke. technology with mechanical calibrated choke system, engineered and assembled in the U.S.A.

MODEL		KT715	KT725	KT730	KT735	KT740	KT745
GROSS POWER @ 3600 RPM	max. hp (kW)	20 (14.9)	22 (16.2)	23 (17.2)	24 (17.9)	25 (18.6)	26 (19.4)
DISPLACEMENT	cu in (cc)	44 (725)				44 (725) PRO air filter 45 (747)	45 (747)
BORE	in (mm)					3.3 (83)	
STROKE	in (mm)	44 (725)				2.6 (67) PRO air filter 2.7 (69)	2.7 (69)
PEAK TORQUE @ RPM	ft-lb (Nm)	40.3 (54.6) @ 2200	40.4 (54.8) @ 2200	40.5 (54.9) @ 2200	40.5 (54.9) @ 2400	41.3 (56) @ 2600	42.4 (57.5) @ 2600
COMPRESSION RATIO		9.1:1					
DRY WEIGHT	lb (kg)	85 (38.6)					
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)					
LUBRICATION		Pressure lubrication with full-flow filter					
DIMENSIONS* L x W x H	in (mm)	18.6 x 17.5 x 13.4 (473 x 445 x 341) With HD Performance air filtration: 18.6 x 17.5 x 13.9 (473 x 445 x 354)			18.6 x 17.5 x 13.4 (473 x 445 x 341) With HD Performance air filtration: 18.6 x 17.5 x 13.9 (473 x 445 x 354) With PRO Performance air filtration: 18.7 x 17.5 x 15.7 (475 x 445 x 399)		

RATED PER SAE J1940 GROSS

*Length is front of air cleaner cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen or air filter.


†PRO Performance Warranty: 3-Yr Consumer, 1-Yr Commercial

Consumer / 58

6600 Series™


KT600, KT610, KT620

MAXIMUM POWER

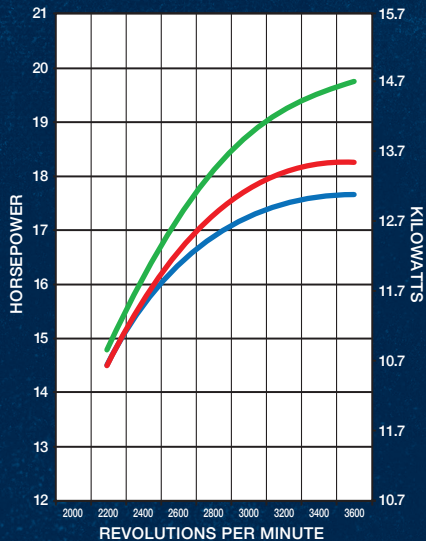

■ KT600 ■ KT610 ■ KT620

MAXIMUM TORQUE

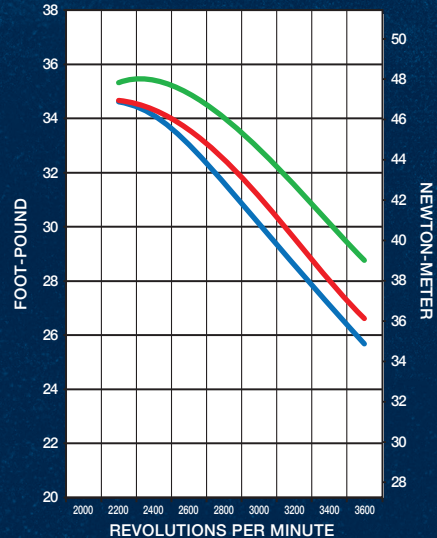

■ KT600 ■ KT610 ■ KT620

6600 Series™



17-21 HP

KT610

Cooling Air
Cylinders V-Twin
Shaft Vertical
Warranty 3-Yr Consumer
 90-Day Commercial

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features
 Compact profile, reduced vibration, cast-iron cylinder liners, pressure lubrication, Consistent-Cut.™ technology for more consistent power, dual-sealed air filter, optional HD Performance air filtration and platinum spark plugs, Smart-Choke.™ technology with mechanical calibrated choke system.

MODEL		KT600	KT610	KT620
GROSS POWER @ 3600 RPM	max. hp (kW)	17 (12.7)	19 (14.2)	21 (15.7)
DISPLACEMENT	cu in (cc)	40 (660)		
BORE	in (mm)	3.3 (83)		
STROKE	in (mm)	2.4 (61)		
PEAK TORQUE @ RPM	ft-lb (Nm)	34.5 (46.8) @ 2200		35.9 (48.7) @ 2200
COMPRESSION RATIO		9.1:1		
DRY WEIGHT	lb (kg)	82 (37.2)		
OIL CAPACITY	U.S. qt (L)	2.0 (1.9)		
LUBRICATION		Full-pressure lubrication with full-flow filter		
DIMENSIONS* L x W x H	in (mm)	18.6 x 16.7 x 13.4 (473 x 424 x 341)		With HD Performance air filtration: 18.6 x 16.7 x 13.9 (473 x 424 x 354)

RATED PER SAE J1940 GROSS


*Length is front of air cleaner cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen or air filter.

Consumer / 60

Courage®


SV471, SV530, SV541, SV591, SV601

MAXIMUM POWER

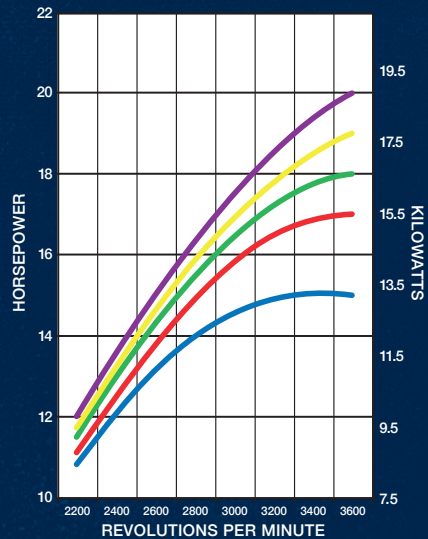

■ SV471 ■ SV530 ■ SV541
■ SV591 ■ SV601

MAXIMUM TORQUE

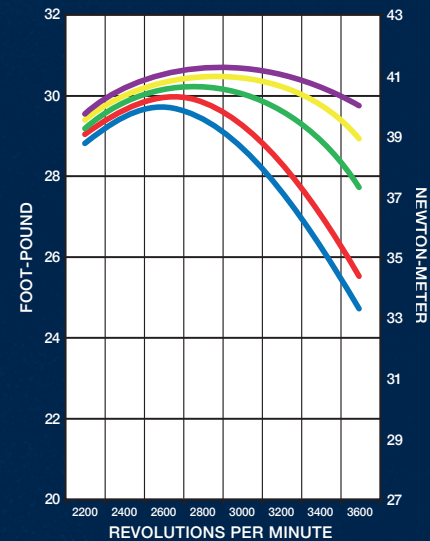

■ SV471 ■ SV530 ■ SV541
■ SV591 ■ SV601

5400 Series™



17-19.5 HP

KS595

Cooling Air
Cylinders Single
Shaft Vertical
Warranty 2-Yr Consumer

Engine Type
 Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features
 Triple-Balance System, Consistent-Cut... technology, crossflow cylinder head

MODEL		KS530	KS540	KS590	KS595
GROSS POWER @ 3600 RPM	max. hp (kW)	17 (12.7)	18 (13.4)	19 (14.2)	19.5 (14.5)
DISPLACEMENT	cu in (cc)	33 (541)			
BORE	in (mm)	3.7 (94)			
STROKE	in (mm)	3.1 (78)			
PEAK TORQUE @ RPM	ft-lb (Nm)	30.0 (40.7) @ 2600	30.2 (40.9) @ 2600	30.5 (41.4) @ 2600	31.0 (42.0) @ 2600
COMPRESSION RATIO		8.8:1			
DRY WEIGHT	lb (kg)	75 (34.0)			
OIL CAPACITY	U.S. qt (L)	1.5 (1.4)			
LUBRICATION		Pressure lubrication with full-flow filter			
DIMENSIONS* L x W x H	in (mm)	18.0 x 15.5 x 14.2 (457 x 394 x 360)			

RATED PER SAE J1940 GROSS


*Length is front of valve cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen.

Consumer / 62

RH Series™


RH255, RH265

MAXIMUM POWER

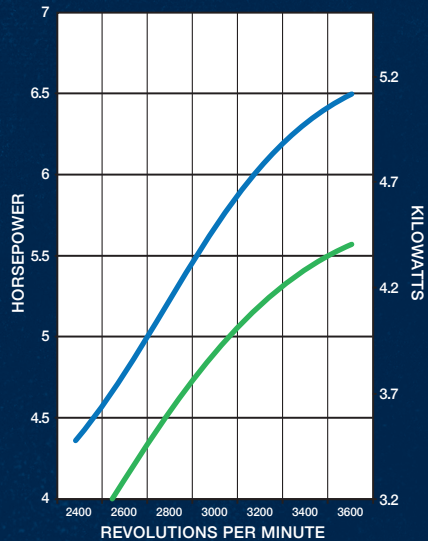

RH255 RH265

MAXIMUM TORQUE

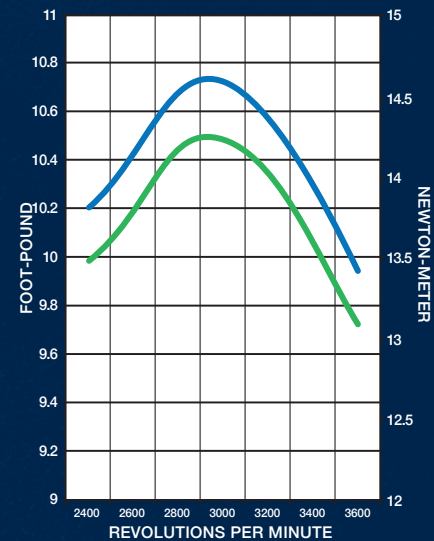

RH255 RH265

RH Series™



5.5-6.5 HP

RH265

Cooling Air
Cylinders Single
Shaft Horizontal
Warranty 2-Yr Consumer

Engine Type
 Four-cycle, gasoline, OHV

Additional Features
 Accu-Fill® fuel tank, single-lever controls, lightweight and compact

MODEL		RH255	RH265
GROSS POWER @ 3600 RPM	max. hp (kW)	5.5 (4.2)	6.5 (4.8)
DISPLACEMENT	cu in (cc)		12 (196)
BORE	in (mm)		2.7 (68)
STROKE	in (mm)		2.1 (54)
PEAK TORQUE @ RPM	ft-lb (Nm)	10.5 (14.2) @ 3000	10.7 (14.5) @ 3000
COMPRESSION RATIO			8.5:1
DRY WEIGHT	lb (kg)		28.8 (13)
OIL CAPACITY	U.S. qt (L)		0.6 (0.6)
FUEL CAPACITY	U.S. qt (L)		2.1 (2.0)
LUBRICATION			Splash
DIMENSIONS* L x W x H	in (mm)	9.8 x 14.0 x 13.0 (249 x 356 x 330)	

RATED PER SAE J1940 GROSS


*Length is recoil starter to PTO mounting surface. Height is with fuel cap.

Consumer / 64

XT Series™

XT650, XT675, XT775

MAXIMUM TORQUE

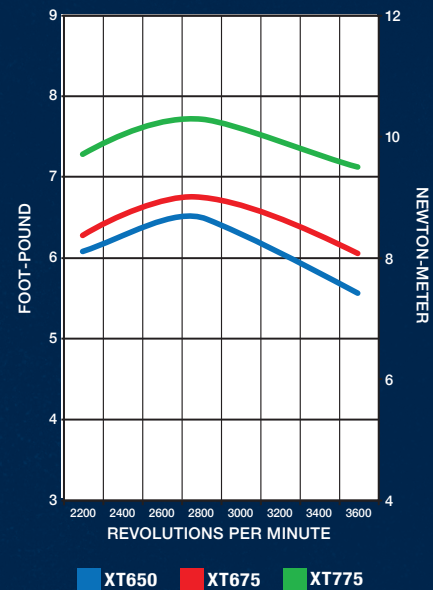

XT Series™



6.5-6.75 FT-LB GROSS TORQUE **XT675**

Cooling Air
Cylinders Single
Shaft Vertical
Warranty 2-Yr Consumer

Engine Type

Four-cycle, air-cooled, gasoline, OHV, lightweight aluminum cylinder liners, aluminum block

Additional Features

Accu-Fill. easy-to-fill fuel tank; easy-pull, smooth, effortless starting; Consistent-Cut. technology for more consistent power; Smart-Choke. easy, no-prime starting; and one-hand, no-tool air cleaner access for easy maintenance

MODEL		XT650	XT675	XT775
GROSS TORQUE @ 2800 RPM	ft lb (Nm)	6.5 (8.8)	6.75 (9.2)	7.75 (10.5)
DISPLACEMENT	cu in (cc)	9.1 (149)		10.6 (173)
BORE	in (mm)	2.6 (65)		2.7 (70)
STROKE	in (mm)	1.8 (45)		
COMPRESSION RATIO		9.2:1		8.5:1
DRY WEIGHT	lb (kg)	21.8 (9.9)		24.9 (11.3)
OIL CAPACITY	U.S. qt (L)	0.6 (0.6)		
FUEL CAPACITY	U.S. qt (L)	1.2 (1.1)		1.5 (1.4)
LUBRICATION		Splash		
DIMENSIONS* L x W x H	in (mm)	14.4 x 14.0 x 10.5 (366 x 356 x 267)		17.1 x 13.9 x 11 (434 x 353 x 279)

RATED PER SAE J1940 GROSS


*Length is front of blower housing to back of blower housing. Width is air cleaner cover to muffler guard. Height is mounting surface to grass screen.

Consumer / 66

XTX Series™

XTX650, XTX675, XTX775

MAXIMUM TORQUE

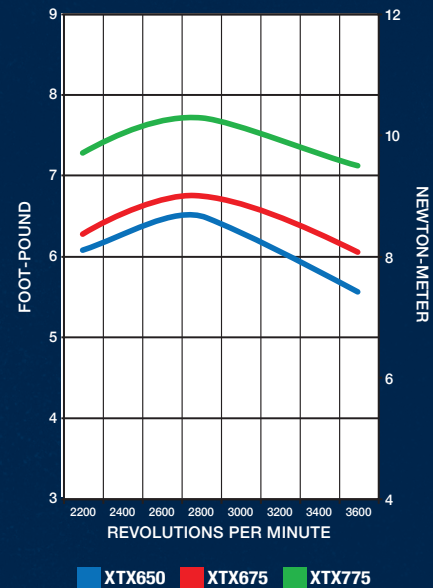

XTX Series™

Engine Type

Four-cycle, air-cooled, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features

Never requires an oil change – just check oil level before each use; based on commercial engine designs; heavy-duty cast-iron cylinder liners; platinum-tip spark plugs; high-mount dipstick; pre-cleaner; Accu-Fill, easy-to-fill fuel tank, Consistent-Cut. technology for more consistent power, one-hand, no-tool air cleaner access for easy maintenance; Smart-Choke. with easy-pull, no-prime starting

Cooling	Air
Cylinders	Single
Shaft	Vertical
Warranty	2-Yr Consumer



6.5-7.75 FT-LB GROSS TORQUE **XTX650**

MODEL		XTX650	XTX675	XTX775
GROSS TORQUE @ 2800 RPM	ft lb (Nm)	6.5 (8.8)	6.75 (9.2)	7.75 (10.5)
DISPLACEMENT	cu in (cc)	9.1 (149)		10.6 (173)
BORE	in (mm)	2.6 (65)		2.7 (70)
STROKE	in (mm)	1.8 (45)		
COMPRESSION RATIO		9.2:1		8.5:1
DRY WEIGHT	lb (kg)	23.8 (10.8)		26.9 (12.2)
OIL CAPACITY	U.S. qt (L)	0.6 (0.6)		
FUEL CAPACITY	U.S. qt (L)	1.2 (1.1)		1.5 (1.4)
LUBRICATION		Splash		
DIMENSIONS* L x W x H	in (mm)	14.4 x 14 x 10.5 (366 x 356 x 267)		17.1 x 13.9 x 11 (434 x 353 x 279)

RATED PER SAE J1940 GROSS

*Length is front of blower housing to back of blower housing. Width is air cleaner cover to muffler guard. Height is mounting surface to grass screen.

Consumer / 68

